

PRODUCT PORTFOLIO



U2 Rugged Wearable

Unleash new possibilities



Basic characteristics

1.2GHz 64-bit CPU
 2GB RAM/16GB ROM
 Magnetic POGO pin (charging, data sync and wired ring scanner support)
 1 Micro SIM
 Support 64GB micro SD card
 Android 7.1

Physical characteristics

118mm×91mm×18mm
 273g (Including battery and wrist band)
 4" capacitive touch screen
 800 × 480 resolution (300Nits)
 2 user definable function keys, 1 home button, 1 back button, 1 context menu button

UBOVO OFFICE LOCATION Battery

Removable 2850mAh lithium ion battery
 Typical operating duration of 10 hours
 Charging time not more than 4 hours

Communication

FDD-LTE Band 1, 2, 3, 4, 5, 6, 7, 8, 20, 28
 3G WCDMA 900, 1900, 2100MHz
 WiFi: 802.11a/b/g/n, 2.4GHz and 5GHz
 Bluetooth Low Energy 4.0
 GPS and AGPS support

Environment

Operating temperature: 0°C to 50°C
 Storage temperature: -20°C to 70°C
 Relative humidity 5%-95% (non condensing)
 1.5 m drop tested
 IP65

Others

3.5mm audio jack
 Speakers (1W, 97dBA)
 Support voice call with internal microphone
 8 M pixel camera with flash

Wired ring scanner



R21

1D or 2D scan engine
 52mm×35mm×28mm
 45g

Bluetooth ring scanner



R20

1D or 2D Scan engine
 Bluetooth 4.0
 1000mAh battery
 68mm×40mm×45mm
 83g

Charging cradle

Charges 2 batteries and 2 ring scanners





i6310 Enterprise Rugged Smartphone

The thinnest rugged PDA in the world



Protective Boot and Handstrap



Gun grip



Cradle Assembly



Basic characteristics

1.4GHz 64-bit CPU
 2GB RAM/16GB ROM
 POGO pin (charging, data sync)
 1 Micro SIM
 Support 64GB micro SD card
 Android 7.1

Communication

FDD-LTE Band 1, 2, 3, 4, 5, 6, 7, 8, 20, 28
 3G WCDMA 900, 1900, 2100MHz
 WiFi: 802.11a/b/g/n, 2.4GHz and 5GHz
 Bluetooth Low Energy 4.0
 GPS and AGPS support

Physical characteristics

158mm×76.2mm×12.6mm
 210g (Including battery and wrist band)
 5" capacitive touch screen
 720 × 1280 resolution (300Nits)

Environment

Operating temperature: 0°C to 50°C
 Storage temperature: -20°C to 70°C
 Relative humidity 5%-95% (non condensing)
 1.5 m drop tested
 IP65

Battery

3800mAh lithium ion battery
 Charging time not more than 4 hours

Others

3.5mm audio jack
 13 M pixel back camera with flash
 5 M pixel front camera
 Support fingerprint reader



i6300 Rugged Full Touch PDA



Gun grip with extended battery



Carry lanyard



Basic characteristics

1.2GHz 64-bit CPU
2GB RAM/16GB ROM
POGO pin (charging, data sync)
1 Micro SIM
Support 64GB micro SD card
Android 5.1

Communication

FDD-LTE Band 1, 3
TDD-LTE Band 38, 39, 40, 41
3G WCDMA 850, 900, 2100MHz
WiFi: 802.11a/b/g/n, 2.4GHz and 5GHz
Bluetooth Low Energy 4.0
GPS and AGPS support

Charging cradle



Physical characteristics

152mm×78mm×26mm
283g (Including battery and wrist band)
5" capacitive touch screen
720 × 1280 resolution (300Nits)

Environment

Operating temperature: 0°C to 50°C
Storage temperature: -20°C to 70°C
Relative humidity 5%-95% (non condensing)
1.5 m drop tested
IP65

Battery

Removable 4000mAh lithium ion battery
Typical charging time not more than 4 hours

Others

3.5mm audio jack
8 M pixel back camera with flash
2 M pixel front camera

Scan engine options





i6200S Enterprise Rugged PDA



Handstrap and carry pouch



Charging cup



Charging cradle



Standard and medical variant



Basic characteristics

1.2GHz 64-bit CPU
 2GB RAM/16GB ROM
 POGO pin (charging, data sync)
 1 Micro SIM
 Support 64GB micro SD card
 Android 5.1

Communication

FDD-LTE Band 1, 3
 TDD-LTE Band 38, 39, 40, 41
 3G WCDMA 850, 900, 2100MHz
 WiFi: 802.11a/b/g/n, 2.4GHz and 5GHz
 Bluetooth Low Energy 4.0
 GPS and AGPS support

Physical characteristics

154mm×73mm×30mm
 310g (Including battery and wrist band)
 4" capacitive touch screen
 480 × 800 resolution (300Nits)
 Numeric keypad

Environment

Operating temperature: 0°C to 50°C
 Storage temperature: -20°C to 70°C
 Relative humidity 5%-95% (non condensing)
 1.5 m drop tested
 IP65

Battery

Removable 3800mAh lithium ion battery
 Typical charging time not more than 4 hours

Others

3.5mm audio jack
 5 M pixel back camera with flash


i9000S Smart POS



Handstrap and carry pouch



Cradle with various options

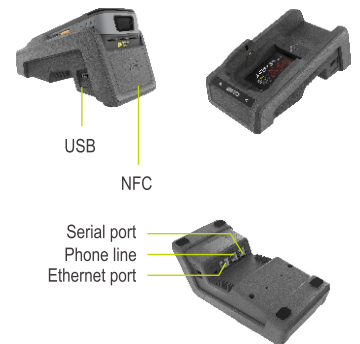

Battery charger



Basic characteristics

1.2GHz 64-bit CPU
2GB RAM/16GB ROM
POGO pin (charging, data sync)
1 SIM Slot
Support 64GB micro SD card
Android 5.1

Communication

FDD-LTE Band 1, 3
TDD-LTE Band 38, 39, 40, 41
3G WCDMA 850, 900, 2100MHz
WiFi: 802.11a/b/g/n, 2.4GHz and 5GHz
Bluetooth Low Energy 4.0
GPS and AGPS support

Physical characteristics

184mm×81mm×51mm
550g (Including battery and wrist band)
5" capacitive touch screen
720 × 1280 resolution
4 user definable function keys

Environment

Operating temperature: 0°C to 50°C
Storage temperature: -20°C to 70°C
Relative humidity 5%-95% (non condensing)
1.2 m drop tested

Battery

Removable 5000mAh lithium ion battery
Typical charging time not more than 4 hours

Payment certification

UnionPay
EMV L1, L2, Contactless
PCI PTS 4.1
Visa payWave
MasterCard PayPass



i9000S-Q Taxi Mobile Computer

Transportation solution



Support frame



Basic characteristics

1.2GHz 64-bit CPU
 2GB RAM/16GB ROM
 POGO pin (charging, data sync)
 1 SIM Slot
 Support 64GB micro SD card
 Android 5.1

Communication

FDD-LTE Band 1, 3
 TDD-LTE Band 38, 39, 40, 41
 3G WCDMA 850, 900, 2100MHz
 WiFi: 802.11a/b/g/n, 2.4GHz and 5GHz
 Bluetooth Low Energy 4.0
 GPS and AGPS support

Physical characteristics

184mm×81mm×51mm
 550g (Including battery and wrist band)
 5" capacitive touch screen
 720 × 1280 resolution
 4 user definable function keys

Environment

Operating temperature: 0°C to 50°C
 Storage temperature: -20°C to 70°C
 Relative humidity 5%-95% (non condensing)
 1.5 m drop tested
 IP65

i3100 Rugged Handheld



Basic characteristics

1GHz CPU
256M RAM/512M ROM
Windows CE Pro 6.0

Communication

WiFi802.11b/g/n
Bluetooth V2.1+EDR

Handstrap



Physical characteristics

189mmx68mmx38mm
330g
2.8" QVGA resistive touch screen

Environment

Operating temperature: 0°C to 50°C
Storage temperature: -20°C to 70°C
Relative humidity 5%-95% (non condensing)
1.5 m drop tested
IP54

Charging cradle



Battery

3800mAh Removable battery
210mAh Backup battery

Others

3.5mm audio jack
5 M pixel camera with flash



V5100 Professional PDT



Charging cradle



Battery charger



Basic characteristics

Android

1.2GHz 64-bit CPU
1GB RAM/8GB ROM
Android 4.3

Windows CE

1GHz CPU
512MB RAM/4GB ROM
Windows CE Pro 6.0

Physical characteristics

Android

192mm×73.8mm×30mm
385g (Including battery and wrist band)
3.5" capacitive touch screen
480 × 640 resolution

Windows CE

192mm×73.8mm×30mm
385g (Including battery and wrist band)
3.5" resistive touch screen
240 × 320 resolution

Battery

Removable 4500mAh lithium ion battery
Typical charging time not more than 4 hours

Communication

Android

3G WCDMA 900, 1900, 2100MHz
WiFi: 802.11b/g/n
Bluetooth Low Energy 4.0
GPS and AGPS support

Windows CE

3G WCDMA 900, 2100MHz
WiFi: 802.11b/g/n
Bluetooth 2.1

Environment

Operating temperature: 0°C to 50°C
Storage temperature: -20°C to 70°C
Relative humidity 5%-95% (non condensing)
1.5 m drop tested
IP64

Others

3.5mm audio jack
5 M pixel camera with flash

UHF Module and gun grip



Lanyard





www.urovo.com/en

UROVO[®]
mobility redefined

Urovo Technology Co., Ltd.

- Tel: +86 755 22673926 • Fax: +86 755 86186290 • Website: www.urovo.com/en • Email: urovo@urovo.com
- A701-710, Zondy Cyber Building, Keyuan South Road, Nanshan District, Shenzhen, 518000, China.

© Copyright 2016 Urovo Technology Corporation Limited. All rights reserved. Urovo is a registered trademark of Urovo Technology Corporation Limited. All other trademarks are the property of their respective owners.
In a continuing effort to improve our products, Urovo Technology Corporation Limited reserves the right to change specifications and features without prior notice.